



Rottweg 17 • D 48683 Ahaus  
Tel. (0 25 61) 93 84-0  
Fax (0 25 61) 93 84 36  
Internet: [www.ab-maschinen.de](http://www.ab-maschinen.de)  
E-Mail: [info@ab-maschinen.de](mailto:info@ab-maschinen.de)

Schweißtechnik  
Lagereinrichtungen  
Industriebedarf  
Werksvertretungen  
Gebrauchtmaschinen

## ZMM - SLIVEN HU 310 (1008-9207330)



**Control type**  
konventionell

**Construction year**  
2002

**Machine no.**  
1008-9207330

**Make**  
ZMM - SLIVEN

**Location**  
Ahaus

\*\* New price ~ 20.000 euros  
\*\* from a technical college (!!)

- in checked condition - machine videos -  
<https://www.youtube.com/watch?v=iqU7Bkh6INo>  
<https://www.youtube.com/watch?v=aSViqjk51Ik>

### Furnishing:

- Robust conventional center lathe
- 3-jaw lathe chuck Ø 160 mm, with replacement jaws
- "NEWALL" digital display, front left
- MULTIFIX steel holder with 4x inserts
- fixed bezel
- moving bezel
- Movable tailstock
- Foot/spindle brake
- Machine swing feet
- User manual (PDF/NL)


\* all technical data:

- Turning diameter over bed 310 mm
- Distance between centers 750 mm
- Turning diameter over support 175 mm
- Spindle bore 32 mm
- bed width 200 mm
- Spindle mount / DIN 55027 GR 5
- Spindle taper 4.5 M
- Spindle speed 85 - 2000 rpm.
- Metric thread range 0.1 - 28 mm
- Thread module range 0.1 - 1.75
- Thread DP range 4 - 70
- Adjustment range cross slide 150 mm
- Adjustment range top slide 95 mm
- Tailstock quill diameter 40 mm
- Tailstock recording 3 MK
- Tailstock quill travel 100 mm
- Motor power 2.2 kW
- Weight 770 kg

## Machine attributes

|                                   |                      |
|-----------------------------------|----------------------|
| turning length:                   | 750 mm               |
| turning diameter:                 | 310 mm               |
| turning diameter over slide rest: | 175 mm               |
| spindle bore:                     | 32.0 mm              |
| tailstock quill taper MT:         | 3 MK                 |
| turning speeds:                   | 85 - 2200 U/min      |
| bed width:                        | 200 mm               |
| spindle taper:                    | DIN 55027 GR 5       |
| total power requirement:          | 2.2 kW               |
| weight of the machine ca.:        | 710 kg               |
| range L-W-H:                      | 1884 x 717 x 1262 mm |

## Machine images

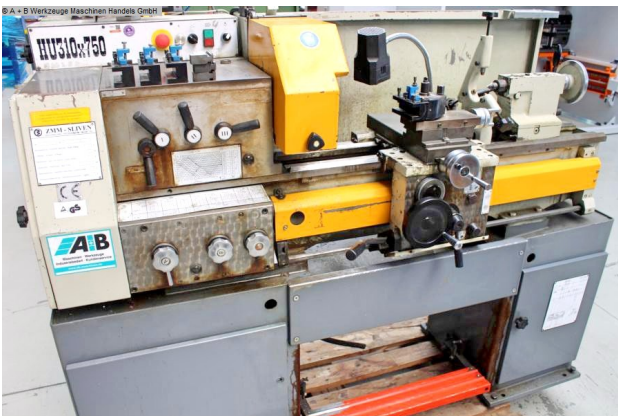



Rottweg 17 • D 48683 Ahaus  
Tel. (0 25 61) 93 84-0  
Fax (0 25 61) 93 84 36  
Internet: [www.ab-maschinen.de](http://www.ab-maschinen.de)  
E-Mail: [info@ab-maschinen.de](mailto:info@ab-maschinen.de)

Schweißtechnik  
Lagereinrichtungen  
Industriebedarf  
Werkvertretungen  
Gebrauchtmaschinen





Rottweg 17 • D 48683 Ahaus  
Tel. (0 25 61) 93 84-0  
Fax (0 25 61) 93 84 36  
Internet: [www.ab-maschinen.de](http://www.ab-maschinen.de)  
E-Mail: [info@ab-maschinen.de](mailto:info@ab-maschinen.de)

Schweißtechnik  
Lagereinrichtungen  
Industriebedarf  
Werksvertretungen  
Gebrauchtmaschinen

© A + B Werkzeuge Maschinen Handels GmbH

**ZMM - SLIVEN**  
WERKZEUGMASCHINEN / GEREEDSCHAPMACHINE / MACHINE TOOLS

Typ  Nr

Nennspannung / Nominale spanning / Rated voltage  V

3-Phasen / 3-Fasen / 3-Phase  Hz

Nennstrom / Nomiale stroom / Rated current  A

Hauptmotor / Hoofdmotor / Main motor  kW

Steuerspannung / Stuurstroomspanning / Control current  V

Versorgung-Beleuchtung / Verlichting-accessoires / Lighting  V