



Rottweg 17 • D 48683 Ahaus
Tel. (0 25 61) 93 84-0
Fax (0 25 61) 93 84 36
Internet: www.ab-maschinen.de
E-Mail: info@ab-maschinen.de

Schweißtechnik
Lagereinrichtungen
Industriebedarf
Werksvertretungen
Gebrauchtmaschinen

FASTI / HOAN CHE 25/4 (1008-9325391)



Control type
konventionell

Construction year
1981

Machine no.
1008-9325391

Make
FASTI / HOAN

Location
Ahaus

** Machine from training workshop

** good / well-maintained condition (!!)

Equipment:

- robust electro-hydraulic "swing cut" guillotine shears
- electro-motorized rear stop
- electric cutting length limiter
- electro-motorized cutting gap adjustment
- front support table including recessed grips
- 1x stable side stop, with scale and tilting cam
- 3x stable, front support arms
- 1x freely movable foot switch
- front finger guard
- EMERGENCY STOP button at the front
- operating instructions

* Special accessories included:

- pneumatic sheet holding device for thin sheet metal cuts

Machine attributes

sheet width - max.:	2535 mm
plate thickness:	4.0 mm ST
plate thickness:	2.5 mm VA
plate thickness:	6.0 mm ALU
number of strokes - loaded:	20 Hub/min
cutting angle:	1.7 °
work height max.:	900 mm
total power requirement:	8.5 kW
weight of the machine ca.:	3400 kg
range L-W-H:	2916 x 2250 x 1760 mm


Machine images





Rottweg 17 • D 48683 Ahaus
Tel. (0 25 61) 93 84-0
Fax (0 25 61) 93 84 36
Internet: www.ab-maschinen.de
E-Mail: info@ab-maschinen.de

Schweißtechnik
Lagereinrichtungen
Industriebedarf
Werkvertretungen
Gebrauchsmaschinen

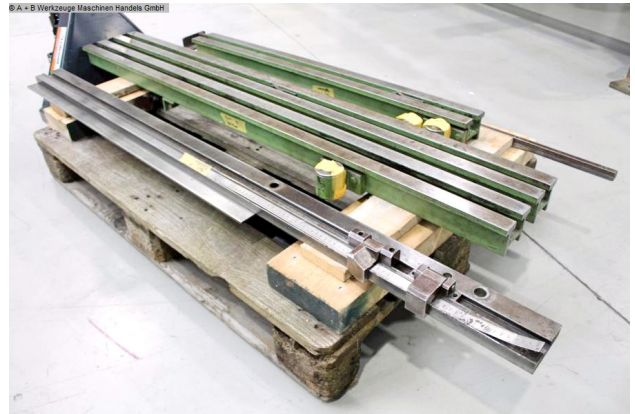



Rottweg 17 • D 48683 Ahaus
Tel. (0 25 61) 93 84-0
Fax (0 25 61) 93 84 36
Internet: www.ab-maschinen.de
E-Mail: info@ab-maschinen.de

Schweißtechnik
Lagereinrichtungen
Industriebedarf
Werksvertretungen
Gebrauchtmaschinen

© A + B Werkzeuge Maschinen Handels GmbH

FASTI-HOAN ^{K/S}
DK - 8300 ODDER

TELEFON - 06 - 54 04 66
TELEX - 60802 HOAN DK

TYPE	CHE 25/4
FABRIKATIONS NR.	3748
FABRIKATIONS ÅR	1981
SAKSENS VÆGT KG.	3400
MAX PLADETYKKELSE v. 400N/mm ² MM.	4
MAX ARBEJDSTRYK MPa.	2748

OLIETYPE BP ENERGOL HLP 46 ISO