



Rottweg 17 • D 48683 Ahaus
Tel. (0 25 61) 93 84-0
Fax (0 25 61) 93 84 36
Internet: www.ab-maschinen.de
E-Mail: info@ab-maschinen.de

Schweißtechnik
Lagereinrichtungen
Industriebedarf
Werksvertretungen
Gebrauchtmaschinen

KINGSLAND COMPACT 45 HYDRAULIC (1008-9412169)



Control type
konventionell

Machine no.
1008-9412169

Make
KINGSLAND

Location
Ahaus

- ** from a maintenance workshop
- ** New price ~ 13.000 euros
- ** Special price on request

Furnishing:

- electro-hydraulic profile steel shear
- Punching station, flat steel shears, angle/profile steel shears,
.. notching station
- continuous adjustment of the stroke path
- very compact design
- Support table at notching and punching station
- side support tables
- 1x manually adjustable contact length stop
- 1x freely movable foot switch
- Central lubrication

* Machine link:

<http://mhp.logotech.de/hpm/v7/Datenblatt/datenblatt.php?machineno=1008-9412169>

Machine attributes

punching pressure:	45.0 t
punch diameter:	22 in 15.0 mm
punch diameter:	38 in 8.0 mm
round bar steel:	30.0 mm
square edge steel:	25.0
L-beam:	100 x 10.0 mm
shear: flat material:	300 x 12.0 mm
adjustment of stroke:	0 - 55 mm
work height max.:	940 / 1140 mm
strokes per minute:	34
punch diameter:	max. 110 mm
voltage:	400 V
total power requirement:	4.5 kW
weight:	1245 kg
dimensions:	1520 x 590 x 1700 mm

Machine images





Rottweg 17 • D 48683 Ahaus
Tel. (0 25 61) 93 84-0
Fax (0 25 61) 93 84 36
Internet: www.ab-maschinen.de
E-Mail: info@ab-maschinen.de

Schweißtechnik
Lagereinrichtungen
Industriebedarf
Werksvertretungen
Gebrauchtmaschinen



© A + B Werkzeuge Maschinen Handels GmbH



© A + B Werkzeuge Maschinen Handels GmbH



© A + B Werkzeuge Maschinen Handels GmbH




© A + B Werkzeuge Maschinen Handels GmbH



Tribotec
+420 543 212 308
www.tribotec.cz
Pump type CMO 035
Part No. 1001290
Tank capacity 0,35 l
Flow rate 50-250 cSt (40°)
Oil

WARNING
To safely draw handle, the automatic return
produces the return of the handle. Do not
force the return of handle. Clean carefully
the table that can be repaired inside
the vessel set on the table side.

УПОЗОРЕНИЕ
Машини автоматски повратувањето
произведува враќање на ручката. Не
примувајте враќање на ручката. Чисто
поголемо внимание. Чисто постојат
решенија и мерки за заштита.

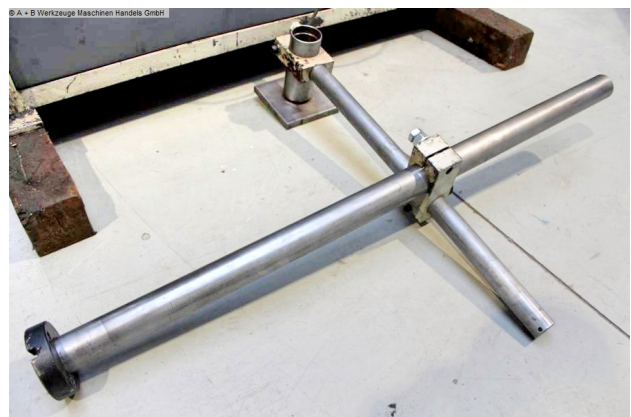

© A + B Werkzeuge Maschinen Handels GmbH



Rottweg 17 • D 48683 Ahaus
 Tel. (0 25 61) 93 84-0
 Fax (0 25 61) 93 84 36
 Internet: www.ab-maschinen.de
 E-Mail: info@ab-maschinen.de

Schweißtechnik
 Lagereinrichtungen
 Industriebedarf
 Werksvertretungen
 Gebrauchtmachines

© A + B Werkzeuge Maschinen Handels GmbH

ENGINEERING Co. Ltd

KINGSLAND

WEYBOURNE ROAD,
 SHERINGHAM,
 NORFOLK NR26 8HE

MADE IN ENGLAND.
 TEL: 0044 1263 822153
 FAX: 0044 1263 825687

COMPACT 45 **CE**

HYDRAULIC

<p>PUNCHING</p> <p>STD. BOLSTER</p> <p>MM 22x15 38x8</p> <p>INCH 1 1/16 x 5/8 1 1/2 x 3/16</p> <p>BEFORE OPERATING ENSURE STRIPPER IS IN POSITION AND PUNCH IS CENTRAL IN DIE WITH EQUAL CLEARANCE OF 5% OF MATERIAL THICKNESS.</p> <p>BENDING CAPACITY 100 x 12/4 x 1/2 FLAT BAR</p>	<p>SECTION CUTTING</p> <p>ROUND BAR ● MM 30 INCH 1 1/16 SQUARE BAR ■ MM 25 INCH 1 - WITH EXTRA BLADES - I I UP TO MM 76 INCH 3</p> <p>ENSURE MATERIAL IS FIRMLY HELD AGAINST THE CORRECTLY SET SUPPORT.</p>
<p>SHEARING</p> <p>FLAT BAR</p> <p>MM 200 x 15 INCH 8 x 3/8 MM 300 x 12 INCH 12 x 1/2 ANGLE TRIM 80 x 10 3/8 x 3/8</p> <p>ENSURE HOLD-DOWN IS SET FOR RELATIVE SIZE OF MATERIAL.</p>	<p>NOTCHING</p> <p>VEE-EXTRA TOOLS UP TO 90°</p> <p>RECTANGULAR</p> <p>MM 35 INCH 1 3/8 MM 75 INCH 3 MM 60 INCH 2 3/8 MATERIAL THICKNESS MM 8 INCH 5/16</p>
<p>ANGLE CUTTING</p> <p>AT 90° MM 100.10 INCH 4 x 3/8 MODIFIED BLADE 100.12 4 x 1/2 AT 45° MM 70.6 INCH 2 3/4 x 1/4</p> <p>ENSURE MATERIAL IS FIRMLY HELD AGAINST THE CORRECTLY SET SUPPORT.</p>	<p style="text-align: center;">DANGER</p> <p>DAMAGE TO THE MACHINE OR INJURY TO THE OPERATOR MAY OCCUR IF THE CAPACITY OF THE MACHINE IS EXCEEDED.</p> <p>ALL CAPACITIES ARE CALCULATED USING MATERIAL STRENGTH OF 45 KG/MM² 28 TON/IN²</p>

450 100 105

ALWAYS QUOTE SERIAL NUMBER WHEN ORDERING SPARES.